


# 860

## SFP Connector Pitch 0.8mm SMT Type


### Technical data :

Insulator body:	LCP+30%G.F,UL94V-0 color:Black
Contact:	Stamped and formed,Phosphor Bronze
plating:	Sn or Au plated over Nickel
Durability:	100 Cycles Min.
Contact resistance:	20 milliohms Max
Withstanding Voltage:	265V AC/Minute
Operating Temperature:	-55 °C ~+125 °C
Max.processing Temp:	230 °C for 60 seconds. 260 °C for 20 seconds.
Mate with:	1.0mm thickness card

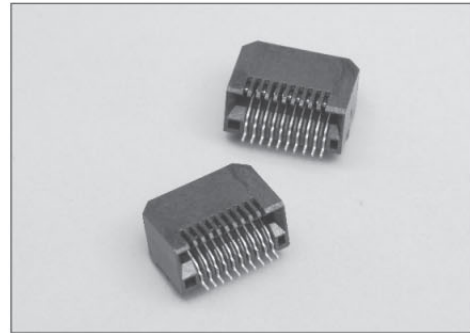

### RoHS Compliant

#### Standard TYPE

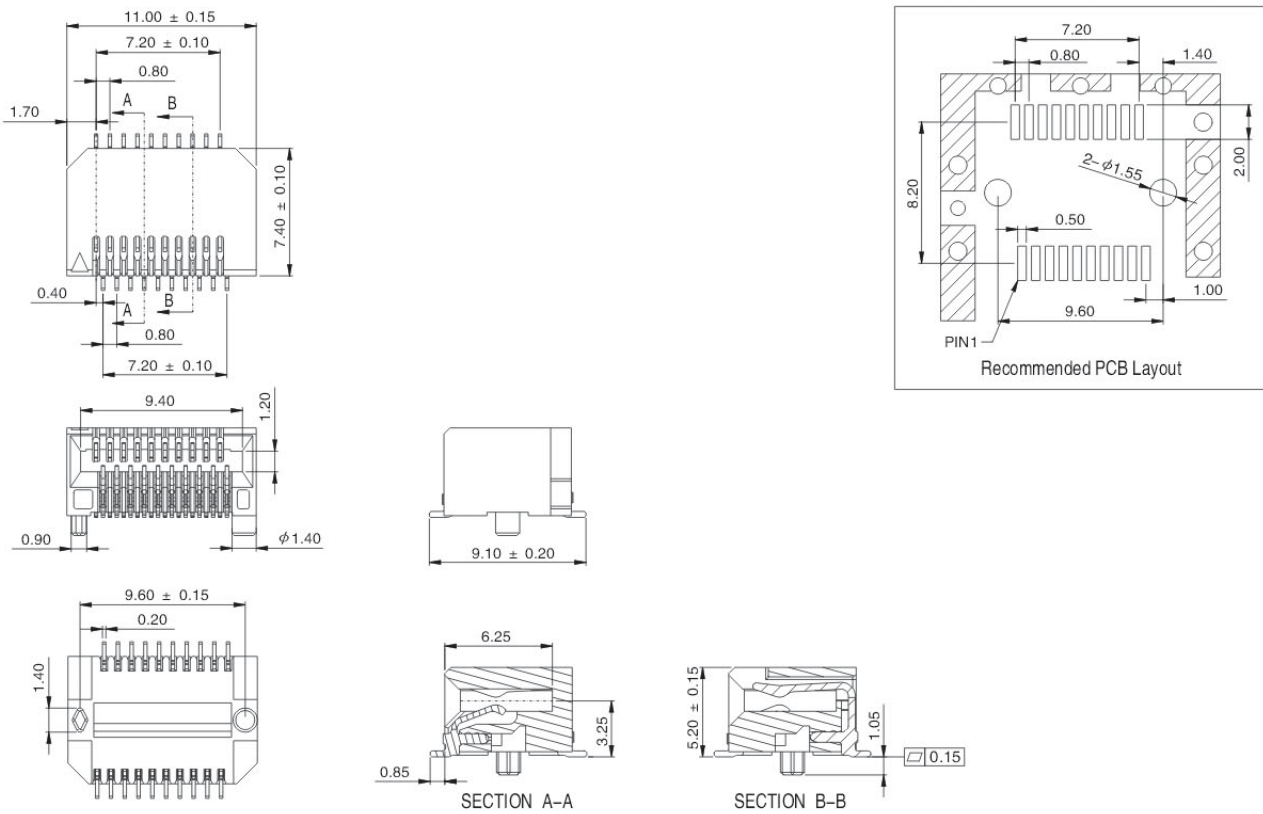

### How to order



Nr. of Contact	Code
20	20
N=10	

card thickness option	Code
1.0mm	1

Profile option	Code
Standard Type(5.2mm)	1

Plating option	Code
Full Gold Flash plated	10
Tin plated	50
Selective gold flash plated	60
10u*Selective gold plated	610
15u*Selective gold plated	615

Packing Option	Code
Tube	1
Tape & Reel	2

W.E.