




REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

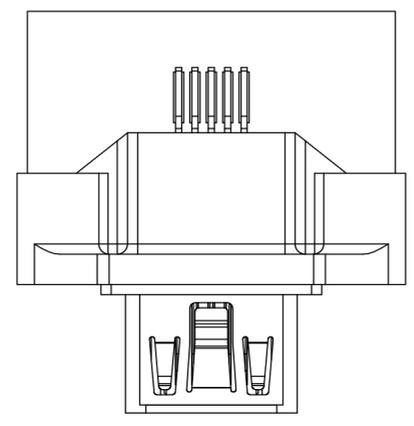


TOP VIEW

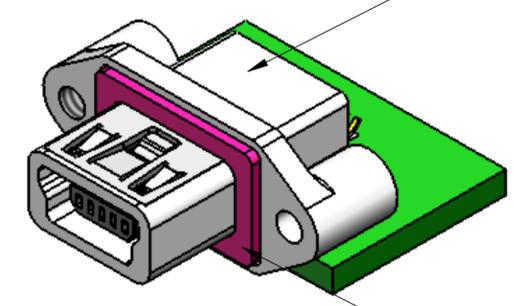


ISO VIEW

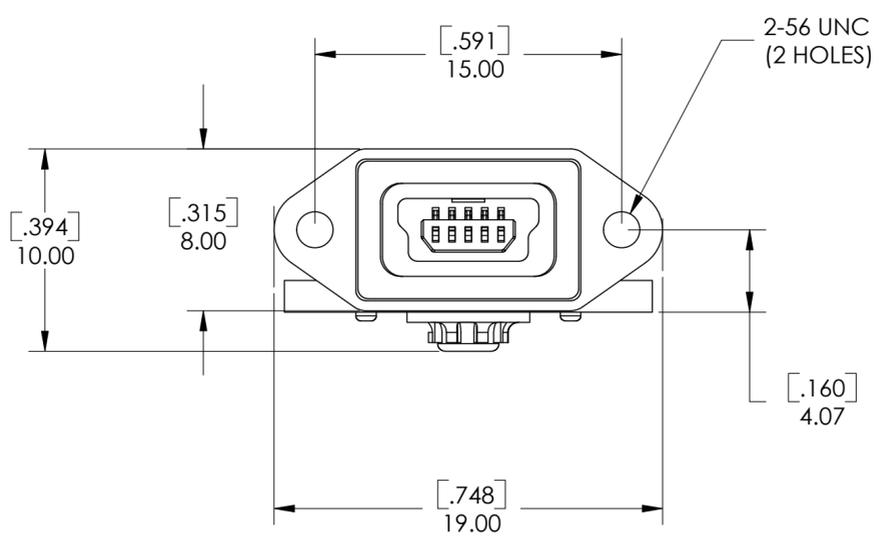


FRONT VIEW

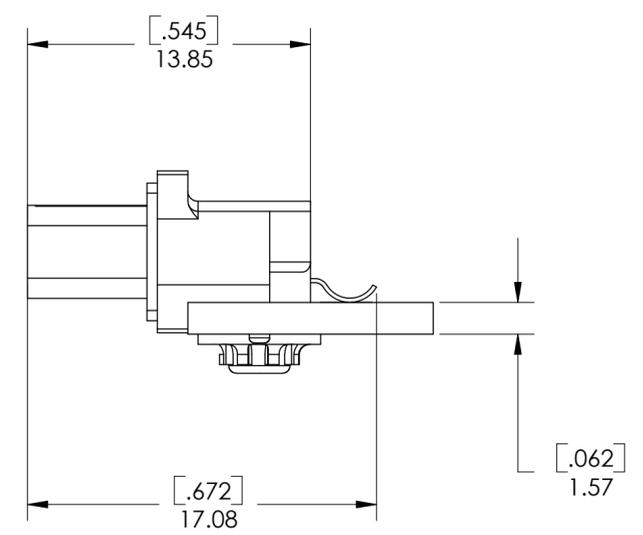

SIDE VIEW
P.C.B. THICKNESS 0.062"

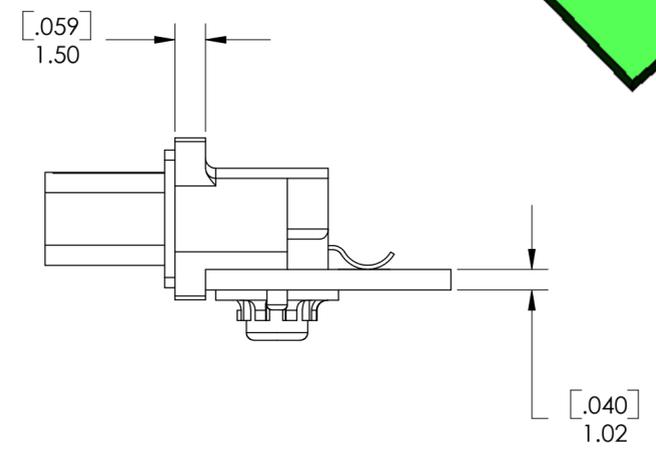

SIDE VIEW
P.C.B. THICKNESS 0.040"

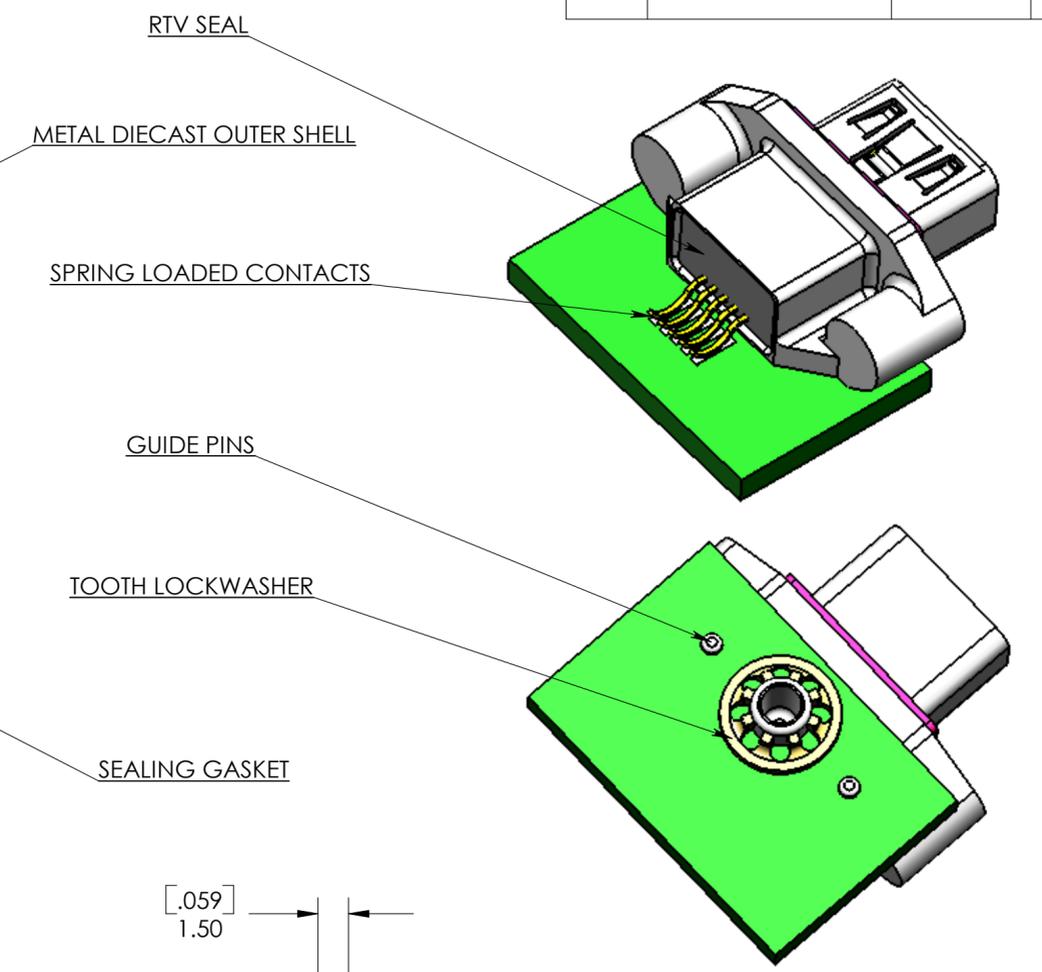

NOTES:

- MATERIAL:
 - SHELL: DIECAST METAL, NICKEL PLATED.
 - CONTACTS: COPPER ALLOY GOLD OVER NICKEL PLATED.
 - INSULATOR: HIGH STRENGTH THERMOPLASTIC 94V-0 FLAMMABILITY RATING.
 - GASKET: SILICONE RUBBER.
- FEATURES:
 - DIE CAST NICKEL PLATED ALUMINUM SHELL FOR EXTRA STRENGTH.
 - FULLY SEALED CONNECTOR IN THE MATED AND UNMATED CONDITIONS TO IP 67.
 - SMALL FOOT PRINT TO SAVE SPACE.
 - SOLDERLESS TERMINATION DESIGN.

DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETER TOLERANCES ARE: DECIMALS ANGLES .XX ± .15 ± 3° .X ± .25	APPROVALS		DATE		Amphenol Rugged Mobile Devices		
	DRAWN S.SEMENOV		2004/03/10				
	DESIGNED S.SEMENOV		2004/03/10		TITLE RUGGED SOLDERLESS MINI-B-USB CONNECTOR		
	CHECKED K.BOUTROS		2004/03/10				
	QA APP'D						
REF.		IE APP'D		SIZE C	DWG. NO. P-MUSB-B51101	REV. B	
CODE IDENT. NO.		DWG APP'D K.BOUTROS		2004/03/10	SCALE 1:1	PROJECT	SHEET 1 OF 2

