


Industrial/Military Harsh Environment D-subminiature Connectors

IP67

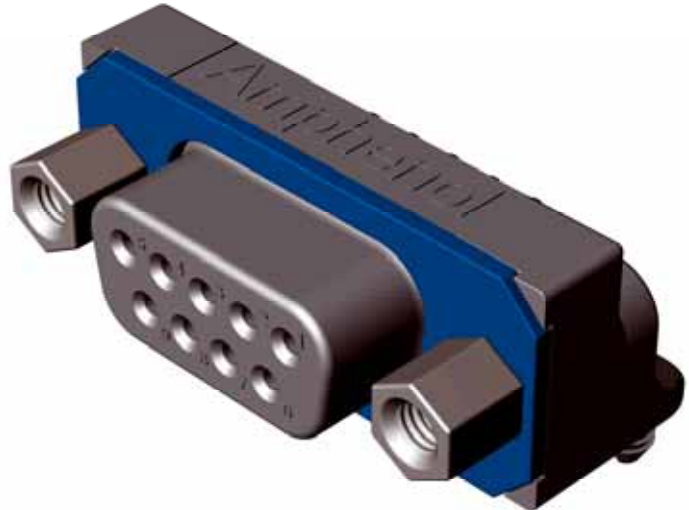

Cost efficient environmentally sealed D-Subminiature connectors with screw machine contacts and high performance thermoplastic shell.

Specification:

Working Voltage:	200 VDC, 125VAC
Dielectric Withstanding Voltage (@25°C & 50 mA max. charging current)	500 VDC
Minimum Insulation Resistance (@25°C & working voltage)	10 Gohms
Contact current rating (continuous max, DC)	7.5 Amperes
Continuous operating temperature	-40°C to +125°C

Materials & Finishes:

Contacts:	Copper alloy gold over nickel plate
Gasket:	Silicone rubber
Insulator:	High temperature thermoplastic

Amphenol
Rugged Mobile Devices

Tel: 416-754-5697 Fax: 416-754-5709
Email: connect.sales@tmantennas.com www.amphenol-rugged.com